


Technical sheet

Ref. 010134

Steel corner bracket for securing to 0,65 cm wall openings

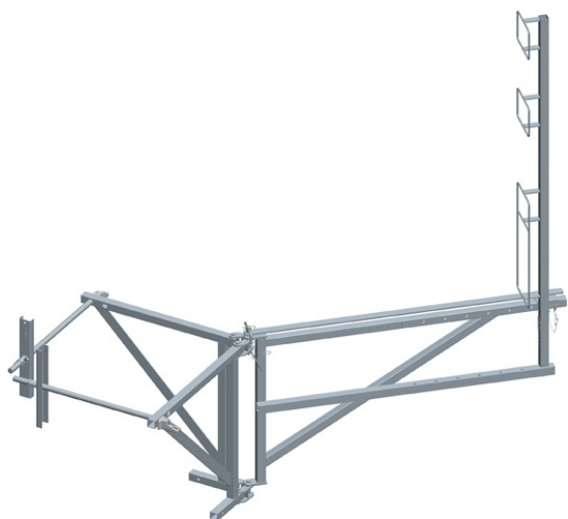

The roof scaffolding is attached to the base of the roof to support the floors and railings.

FEATURES

Efficient, light and easy to assemble,
 Not limiting in terms of space and assembly
 Suitable for any type of roof (tile, slate, zinc, sloping or flat, new or renovation) or for the installation of solar panels
 Meets the requirements of EN 13374 Class C

SPECIFICATIONS

Lenght (mm)	1500
Width (mm)	1500
Height (mm)	2500
Weight (kg)	0

Technical description

Comprises:

- 1 corner console - ref. 20131
- 1 set of triangle attachments - ref. 20132
- 1 corner guardrail 1,50 m - ref. 20136
- 2 wall openings Ø 20 x 0,80 m - ref. 20180

Actions : To work safely

Trades : Slate / Framework / Metal / Tile